

# START HERE

**!** **IMPORTANT:** Use only the power supply provided.

## ITEMS NEEDED:

1. Pro Ex 2.0 WiFi Enabled Irrigation Controller
2. RF Module
3. WiFi Hub

## Powering and Placing your WiFi Hub:

- A) Place your WiFi Hub inside of your home in an area which provides the best signal.
- B) Make sure the selected area has a good WiFi Signal by ensuring your cell phone is connected to your home wireless network in order to view the WiFi signal strength.

## CREATING A USER ACCOUNT AND CONNECTING THE WIFI HUB TO THE CONTROLLER FOR THE FIRST TIME USING AN iOS DEVICE:

1. Download the K-Rain Pro EX 2.0 WiFi Controller App From the App Store.
2. Create a USER Account, using your e-mail address.



### STEP 1

Click on "Create Account" Button

**NOTE:** Password must be at least 6 characters long.

(instructions continued on inside panels)

### STEP 2

Enter a valid e-mail address

### STEP 13

Name your controller, and complete the address location of this controller. Click next.

#### NOTE:

It is important to completely fill in the address for Weather Forecast and Weather IQ™ accuracy.

### STEP 14

Congratulations on setting your WiFi controller. Click DONE.



**K-Rain Manufacturing Corp.**


1640 Australian Avenue  
Riviera Beach, FL 33404 USA  
561.844.1002  
FAX: 561.842.9493

1.800.735.7246 | [www.krain.com](http://www.krain.com)

# ProEX 2.0 WiFi Enabled Controller

## QUICK START GUIDE

Connecting the WiFi hub to the internet

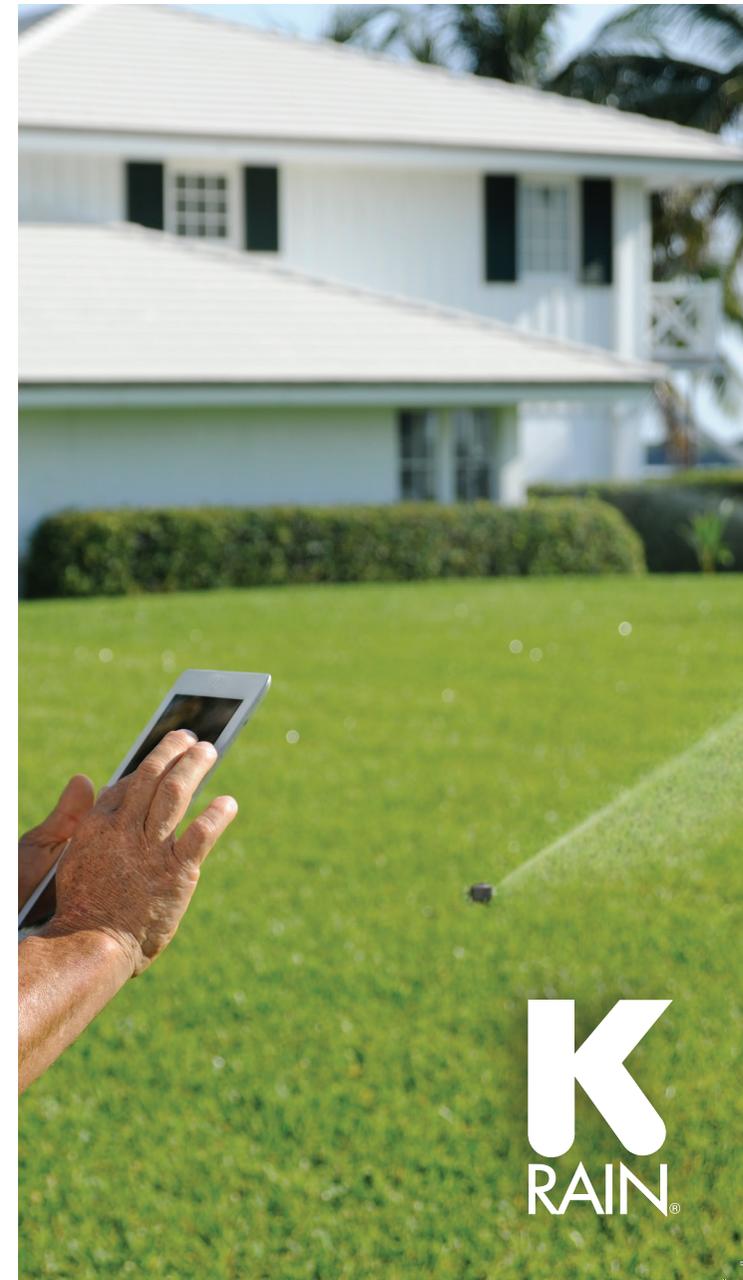

### STEP 3

Enter user information

**NOTE:**

Your smartphone or tablet **MUST** be connected to the WiFi network in order to connect the WiFi Hub.

3. Follow the simple AP (Access Point) setting Wizard to connect your WiFi Hub to your home WiFi Network.


### STEP 4

Reminder screen. Enter user information. After following the procedure indicated, click Next.




### STEP 5

After plugging the power to the WiFi Hub the "K" LED light should be flashing (On/ Off). This may take several seconds.

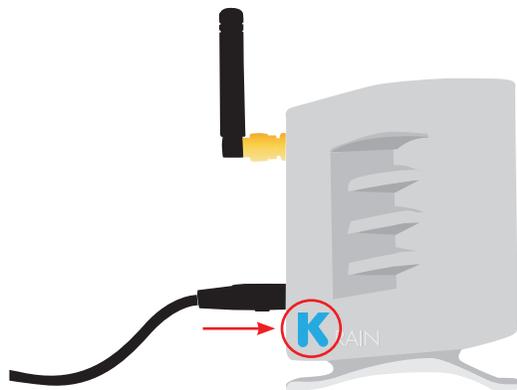

### STEP 6

If the LED is not flashing, reset the hub using the setting button located on the bottom base of the unit. The "K" LED should start flashing (On / Off) after holding down the button for three seconds.



### STEP 7


Click "Open Settings" button and go to the general WiFi settings on the iOS settings screen.



### Connecting your phone to the WiFi Hub:

### STEP 8


Select the KRAIN WiFi network. The WiFi Hub creates a momentary WiFi network during this process in order to authenticate to your router. (During this time the "K" LED is flashing).

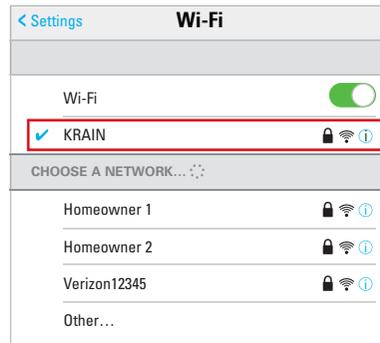

### Connecting your controller to the WiFi Hub:

### STEP 9

Go to the Pro Ex 2.0 controller faceplate. Move the dial to the REMOTE/PIN location.

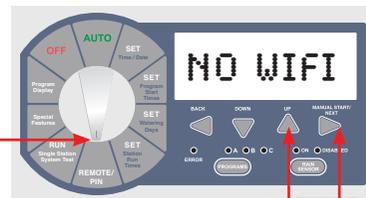

Press UP button until you see NO WiFi on controller LCD.


**FINDING** Press MANUAL START/NEXT button and it will start searching for the WiFi Hub.

The display shows "YS WiFi" on the LCD, it has been paired with the WiFi Hub.



### STEP 10


Go back to K-Rain Pro EX 2.0 WiFi Controller App. It will show this screen as a reminder that the Controller and WiFi hub had to be paired before going into the next step.

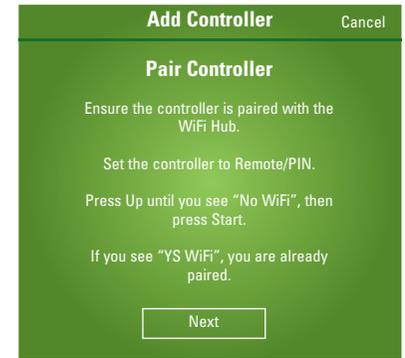

### Connecting your WiFi Hub to your Router:


### STEP 11

Enter your home network WiFi Network (SSID) and password. Click configure controller.

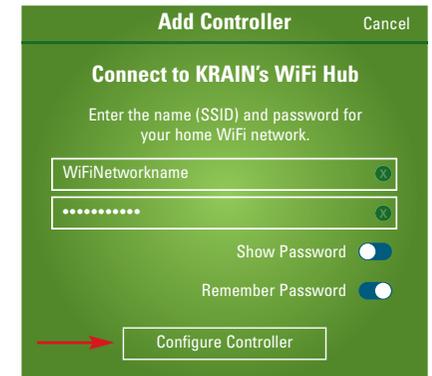

### STEP 12

Confirmation Screen. This step could take a few minutes.

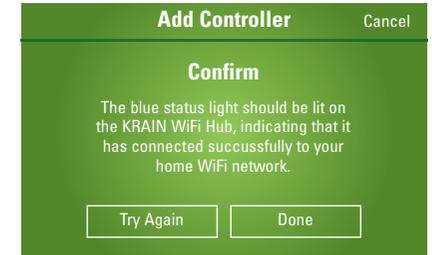

Please wait a few minutes for the WiFi Hub to connect to the Cloud. At this point, the blue light on the Hub should stop flashing and become solid. If the blue light is not solid and has gone out or still flashing, click Try Again and follow the instructions.

(instructions continued on back panel)